

深圳市福浪电子有限公司
FRONTER ELECTRONICS CO., LTD

APPROVAL
SHEET



CUSTOMER: Specelservice Co. Ltd. Russia
DESCRIPTION: HC-49/SMD 25.000MHz Quartz Crystal Resonator
MANUFACTURER PART NO.: FTX25.000M20SM-30/30D
CUSTOMER PART NO.:
USED IN MODEL :
REVISION A1

承 认 APPROVAL		
工程部 TECHNOLOGY DEPT.	品质部 QUALITY DEPT.	采购部 PURCHASING DEPT.

Date: December 22, 2016



深圳市福浪电子有限公司

FRONTER ELECTRONICS CO., LTD

地址 ADD: 深圳市福田区深圳大道 6021 号喜年中心 1112~1117 室

RM.1112-1117, 11/F., XINIAN CENTER, NO.6021, SHENNAN RD.,

SHENZHEN, CHINA.518040

电话 TEL: 86-755-83458798 传真 FAX: 86-755-83459818

网址 WEB ADD: <http://www.chinafronter.com>

E-MAIL:sophile@chinafronter.com

<u>Rev</u>	<u>Revise page</u>	<u>Revise contents</u>	<u>Date</u>	<u>Ref.No.</u>	<u>Reviser</u>
A1	ALL	Initial released		N/A	DavidJiang


FRONTER ELECTRONICS CO., LTD.		
DESCRIPTION	HC-49/SMD 25.000MHz ±30ppm 20pF	Page:
DATE	2016-12-22	2 / 7

1. QUARTZ CRYSTAL UNIT SPECIFICATION

1.1 Frequency:	25.000MHz
1.2 Mode of Oscillation	AT Fundamental
1.3 Holder type :	HC-49/SMD
1.4 Frequency tolerance:	±30ppm at 25℃
1.5 Equivalent series resistance (Rr):	40Ω Max.
1.6 Operating temperature range:	-40℃ To +85℃
1.7 Storage temperature range:	-40℃ To +85℃
1.8 Frequency stability:	±30ppm at -40℃ To +85℃
1.9 Loading capacitance (CL) :	20.0pF
1.10 Drive level (DL):	100 uW Typical
1.11 Shunt Capacitance (C0):	7.0pF MAX
1.12 Insulation resistance (IR):	More than 500M ohms at DC 100V
1.13 Circuit:	Measured in S&A 250B
1.14 Aging:	±5 ppm Max (+25℃ 1 st Year)
1.15 Dimensions and marking	Refer to page.3
1.16 Emboss carrier tape & reel	Refer to page.4

FRONTER ELECTRONICS CO., LTD.		
DESCRIPTION	HC-49/SMD 25.000MHz ±30ppm 20pF	Page:
DATE	2016-12-22	3 / 7

2. MARKING & DIMENSIONS

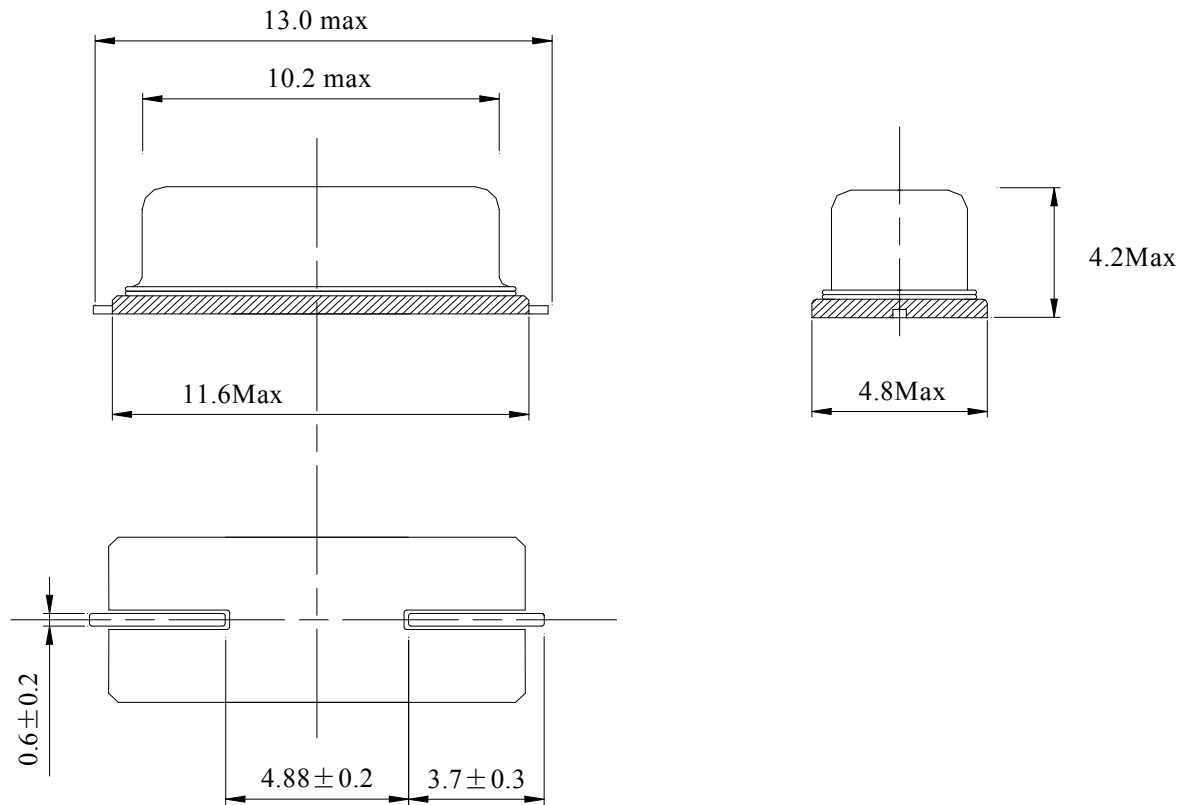

*Marking should be printed as following:

Logo, Nominal Frequency

Logo: T


Nominal Frequency: (ex. 4.000 MHz→4.000)

Marking: Laser marking


FRONTER ELECTRONICS CO., LTD.		
DESCRIPTION	HC-49/SMD 25.000MHz ± 30 ppm 20pF	Page:
DATE	2016-12-22	4 / 7

3.CARRIER TAPE & REEL

a.) Dimensions of Carrier Tape

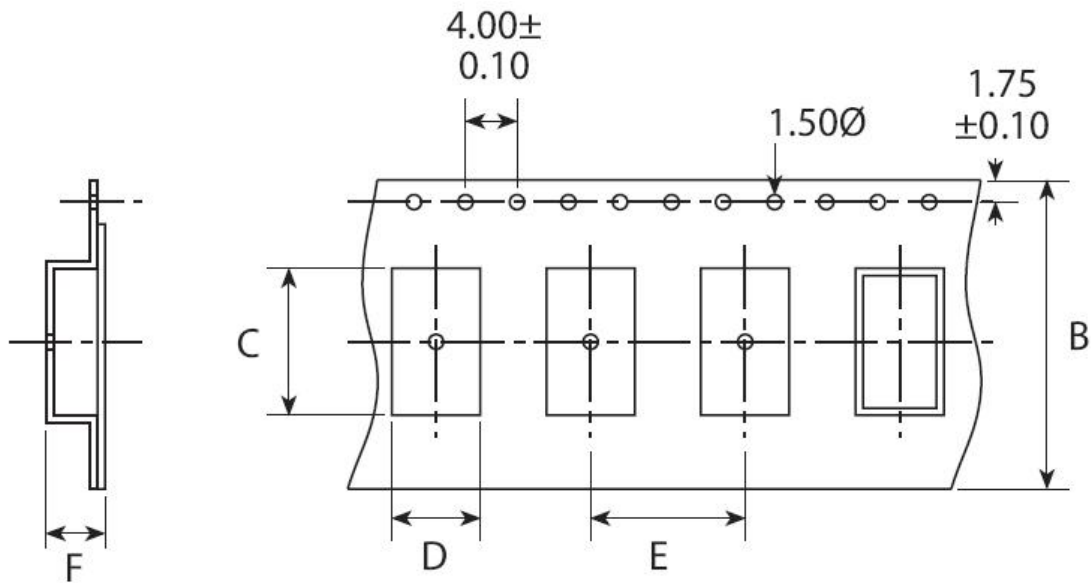

b.) Dimensions of Reel

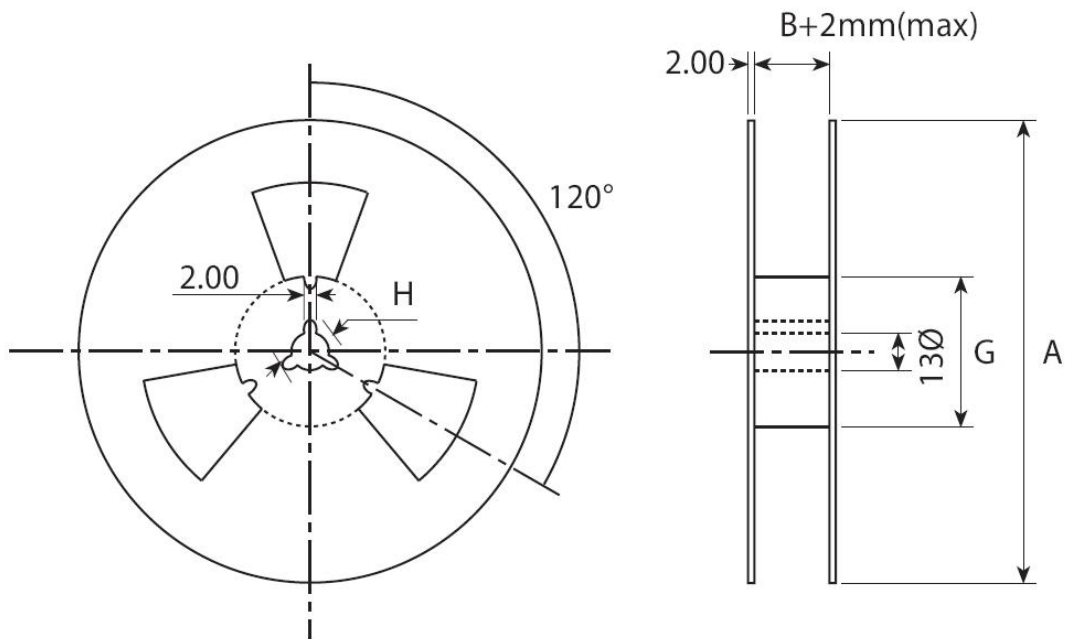

	A	B	C	D	E	F	G
49SMD	330±2.0	24±0.2	13.9	5.6	12.0	4.8	100
1000 pieces of crystal unit per reel							



FRONTER ELECTRONICS CO., LTD.		
DESCRIPTION	HC-49/SMD 25.000MHz ±30ppm 20pF	Page:
DATE	2016-12-22	5 / 7

4.MECHANICAL/ENVIRONMENTAL CHARACTERISTICS

NO.	项 目 ITEM	条 件 CONDITIONS	规 格 SPECIFICATIONS
4.1	漏气试验 Leaking Test	完全浸入 $90 \pm 3^{\circ}\text{C}$ 热水中 3 分钟。 Fully immersed into hot water at $90^{\circ}\text{C} \pm 3^{\circ}\text{C}$ for 3 minutes.	无气泡存在 no air bubble are visible.
		用氦质谱仪测试或酒精加压法测试绝缘电阻。 Take measurements with a helium leakage detector, or measure insulation resistance under pressure.	$1 \times 10^{-8} \text{ Pa.m}^3/\text{s}$ Max or $\text{IR} \geq 500\text{M}\Omega$
4.2	跌落试验 Drop Test	高度 75cm, 自由落体于 3cm 木板上, 6 次 Dropping 6 times from the height of 75 cm onto hard wooden board of thickness more than 30mm.	频率变化 $\pm 5\text{ppm}$ 以内, 电阻变化 $\pm 15\%$ 以内 The crystal must meet: $ \Delta f \leq \pm 5\text{ppm}$ $ \Delta R \leq 15\%$
4.3	振动试验 Vibration Test	频率 10~55Hz, 振幅 1.5mm, 时间 1.5 分钟循环, 在 XYZ 方向各 2 小时。 Vibration Frequency: 10~55Hz Cycle: 1.5 Min. Amplitude: 1.5mm P-P. Direction: X.Y.Z Time: 2 Hours / Each Direction	频率变化 $\pm 5\text{ppm}$ 以内, 电阻变化 $\pm 15\%$ 以内 The crystal must meet: $ \Delta f \leq \pm 5\text{ppm}$ $ \Delta R \leq 15\%$
4.4	可 焊 性 Solderability Test	从引线末端至距底部 2mm 处放入 $230^{\circ}\text{C} \pm 5^{\circ}\text{C}$ 焊槽内,时间: 5 ± 0.5 秒。 The terminal lead wire is to be soaked in a $230^{\circ}\text{C} \pm 5^{\circ}\text{C}$ tin trough for 5 ± 0.5 seconds.	沾锡面 $\geq 90\%$. 频率变化 $\pm 5\text{ppm}$ 以内,电阻变化 $\pm 15\%$ 以内 Tin over the wire $\geq 90\%$ The crystal must meet: $ \Delta f \leq \pm 5\text{ppm}$ $ \Delta R \leq 15\%$
4.5	耐低温性 Low Temperature Enduring	在 $-40^{\circ}\text{C} \pm 3^{\circ}\text{C}$ 下放置 96 小时,取出后在常温下恢复 2 小时。 The samples crystal is to be tested after being placed in the environment of $-40 \pm 3^{\circ}\text{C}$ for 96 hours, and recovered to room temperature for 2 hours.	频率变化 $\pm 5\text{ppm}$ 以内, 电阻变化 $\pm 15\%$ 以内 The crystal must meet: $ \Delta f \leq \pm 5\text{ppm}$ $ \Delta R \leq 15\%$
4.6	耐高温性 High Temperature Enduring	在 $+85^{\circ}\text{C} \pm 3^{\circ}\text{C}$ 下放置 96 小时,取出后在常温下恢复 2 小时。 The samples crystal is to be tested after being heated at $+85 \pm 3^{\circ}\text{C}$ for 96 hours, and cooled to room temperature for 2 hours.	频率变化 $\pm 5\text{ppm}$ 以内, 电阻变化 $\pm 15\%$ 以内 The crystal must meet: $ \Delta f \leq \pm 5\text{ppm}$ $ \Delta R \leq 15\%$

FRONTER ELECTRONICS CO., LTD.

DESCRIPTION	HC-49/SMD 25.000MHz $\pm 30\text{ppm}$ 20pF	Page:
DATE	2016-12-22	6 / 7

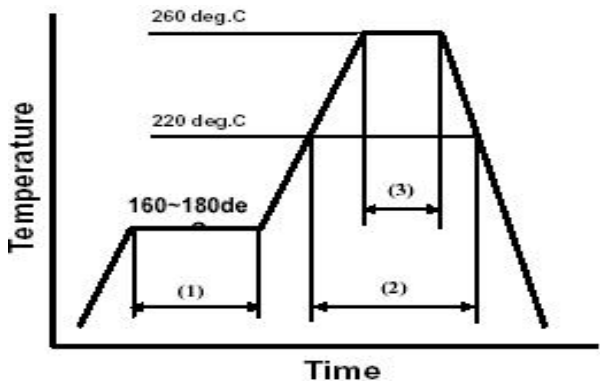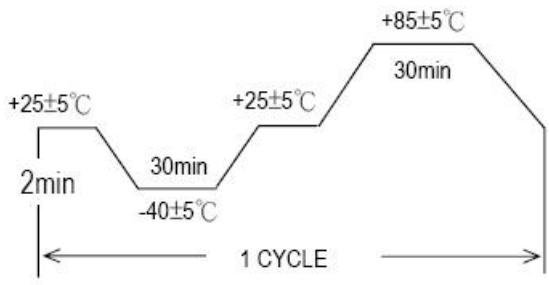4.7	恒定湿热 Humidity	在 $40\pm3^{\circ}\text{C}$、RH $93\%\pm2\%$下放置 96 小时,取出后恢复 2 小时。 The temperature is at $40\pm3^{\circ}\text{C}$, and at $93\%\pm2\%$ RH after 96 hours, and cooled to room temperature for 2 hours.	外观无异常,性能检验同振动 The crystal must meet: $\Delta f \leq \pm 5\text{ppm}$ $\Delta R \leq 15\%$												
4.8	耐焊接热 Resistance to Solder Heat 回流焊 1)Reflow solder	After resonator is soldered for 1 time in following temperature conditions, and then be placed in natural condition for 24-25 hours. Resonator shall be measured.  <table border="1" data-bbox="510 1070 1072 1198"> <tbody> <tr> <td>(1)</td><td>Preheat</td><td>160~180 deg.C</td><td>120sec.</td></tr> <tr> <td>(2)</td><td>Primary heat</td><td>220 deg.C</td><td>60sec.</td></tr> <tr> <td>(3)</td><td>Peak</td><td>260 deg.C</td><td>10sec. Max.</td></tr> </tbody> </table>	(1)	Preheat	160~180 deg.C	120sec.	(2)	Primary heat	220 deg.C	60sec.	(3)	Peak	260 deg.C	10sec. Max.	外观无异常,性能检验同振动 The crystal must meet: $\Delta f \leq \pm 5\text{ppm}$ $\Delta R \leq 15\%$
(1)	Preheat	160~180 deg.C	120sec.												
(2)	Primary heat	220 deg.C	60sec.												
(3)	Peak	260 deg.C	10sec. Max.												
4.9	热冲击 Thermal shock	在 -40°C 保持30分钟, $+85^{\circ}\text{C}$ 保持30分钟,循环10次。 Should be satisfied after supplying the following temperature cycle (10 cycles). (Refer to Fig-4). Temperature shift from low to high, high to low shall be done in $1^{\circ}\text{C}/\text{min}$.  Fig-4	外观无异常,性能检验同振动 The crystal must meet: $\Delta f \leq \pm 5\text{ppm}$ $\Delta R \leq 15\%$												

FRONTER ELECTRONICS CO., LTD.		
DESCRIPTION	HC-49/SMD 25.000MHz $\pm 30\text{ppm}$ 20pF	Page:
DATE	2016-12-22	7 / 7