

深圳市福浪电子有限公司
FRONTER ELECTRONICS CO., LTD.

APPROVAL
SHEET



(Seam Type)

CUSTOMER: Specelservice Co. Ltd. Russia
DESCRIPTION: SMD3225 25.000MHz Quartz Crystal Resonator
MANUFACTURER PART NO.: FTX25.000M18SM3S-30/30D
CUSTOMER PART NO.:
USED IN MODEL :
REVISION A1

承 认 APPROVAL		
工程部 TECHNOLOGY DEPT.	品质部 QUALITY DEPT.	采购部 PURCHASING DEPT.

Date: June 29, 2017



深圳市福浪电子有限公司

FRONTER ELECTRONICS CO., LTD

地址 ADD: 深圳市福田区深圳大道 6021 号喜年中心 1112~1117 室

RM.1112-1117, 11/F, XINIAN CENTER, NO.6021, SHENNAN RD.,

SHENZHEN, CHINA.518040

电话 TEL: 86-755-83458796 传真 FAX: 86-755-83459818

网址 WEB ADD: <http://www.chinafronter.com>

E-MAIL: sophie@chinafronter.com

<u>Rev</u>	<u>Revise page</u>	<u>Revise contents</u>	<u>Date</u>	<u>Ref.No.</u>	<u>Reviser</u>
A1	ALL	Initial released		N/A	DavidJiang

FRONTER ELECTRONICS CO., LTD.

DESCRIPTION	SMD3225 25.000MHz ±30ppm 18pF	Page:
DATE	2017-06-29	2 / 11

1. QUARTZ CRYSTAL UNIT SPECIFICATION

1.1 Nominal Frequency :	25.000MHz
1.2 Holder type :	FTX321S (SMD3225 Seam Type)
1.3 Mode of oscillation :	Fundamental
1.4 Frequency tolerance (Δ FL) :	$\pm 30\text{ppm}$ at $25^{\circ}\text{C} \pm 3^{\circ}\text{C}$
1.5 Equivalent resistance (RR) :	60ohms max
1.6 Operating temperature range (T _{OPR}) :	-40°C To +85°C
1.7 Storage temperature range (T _{STG}) :	-55°C To +125°C
1.8 Frequency Stability :	$\pm 30\text{ppm}$ at -40°C To +85°C
1.9 Loading capacitance (CL) :	18pF
1.10 Drive level (D _L) :	100 uW Typical (200uW max)
1.11 Shunt Capacitance (C0) :	3.0pF max
1.12 Insulation resistance (IR) :	More than 500M Ω at DC 100V
1.13 Circuit :	Measured in HP/E5100A,S&A 250B
1.14 Aging :	± 3 ppm Max (+25°C 1 st Year)
1.15 Dimensions and marking :	Refer to page.3
1.16 Emboss carrier tape & reel :	Refer to page.5 and page.6

1.17 Note :

Standard atmospheric conditions



Unless otherwise specified, the standard range of atmospheric conditions for making measurement and tests are as follow:

Ambient temperature : $25 \pm 3^{\circ}\text{C}$


Relative humidity : 40%~70%

FRONTER ELECTRONICS CO., LTD.		
DESCRIPTION	SMD3225 25.000MHz $\pm 30\text{ppm}$ 18pF	Page:
DATE	2017-06-29	3 / 11


2. FTX321S MARKING & DIMENSIONS



Marking #2, #4 is connected with metal cap of top.



<TOP VIEW>

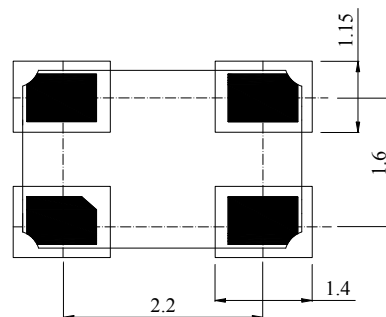

Recommended Solder Pad Layout:

*Marking should be printed as following:

Logo, Nominal Frequency

*Manufacturing Logo: FT

*Nominal frequency = 3 number after decimal point MAX.


(ex. 25.000 MHz → 25000)

Marking: Laser marking

FRONTER ELECTRONICS CO., LTD.

DESCRIPTION	SMD3225 25.000MHz ± 30 ppm 18pF	Page:
DATE	2017-06-29	4 / 11

3. INSIDE STRUCTURE

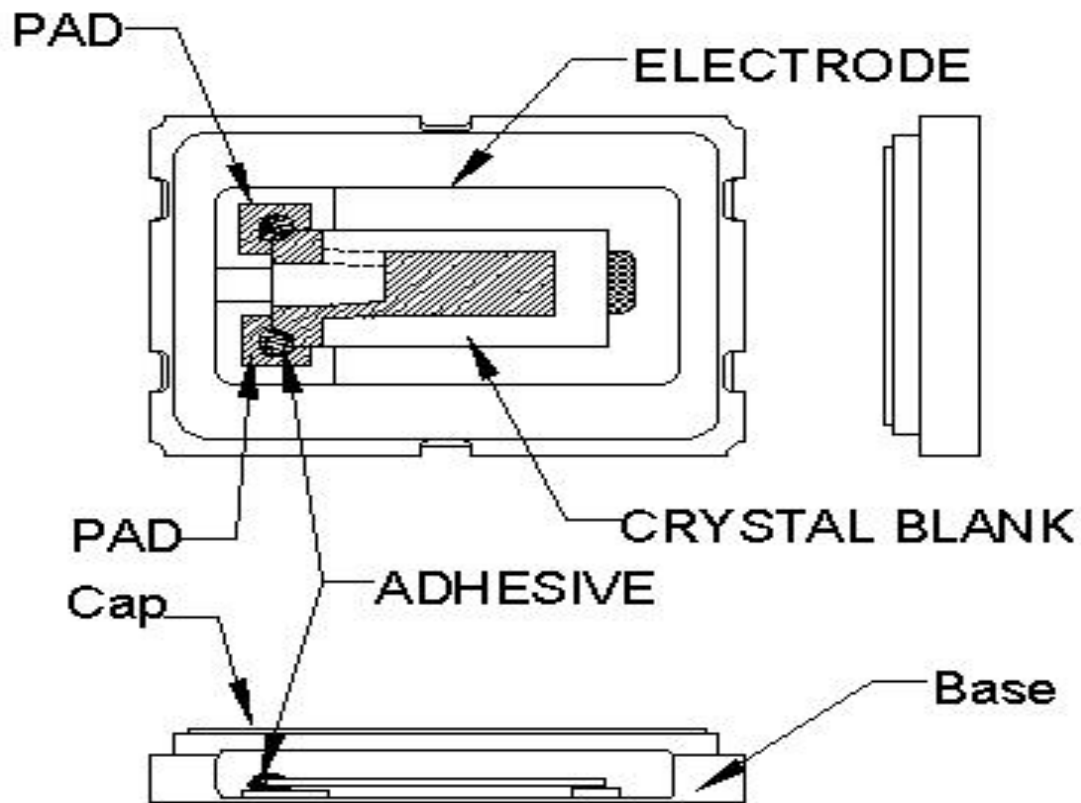


Reference drawing

Base:
Alumina Ceramic (Al ₂ O ₃)
Metallized Pad: W
Ni Plating
Au Plating
Cap:
Fe-Ni
(3) Crystal Enclosure Seal:
Seal Seam
(4) Crystal Blank
Rectangular At-Cut Quartz Crystal Blank
(5) Adhesive
Silver Conductive Polyimide Resin
(6) Electrode
Ag
(7) PAD
Alumina Ceramic (W. Ni. Au)

FRONTER ELECTRONICS CO., LTD.		
DESCRIPTION	SMD3225 25.000MHz ±30ppm 18pF	Page:
DATE	2017-06-29	5 / 11

4. FTX321S EMBOSS CARRIER TAPE & REEL


a.) Dimensions of Carrier Tape

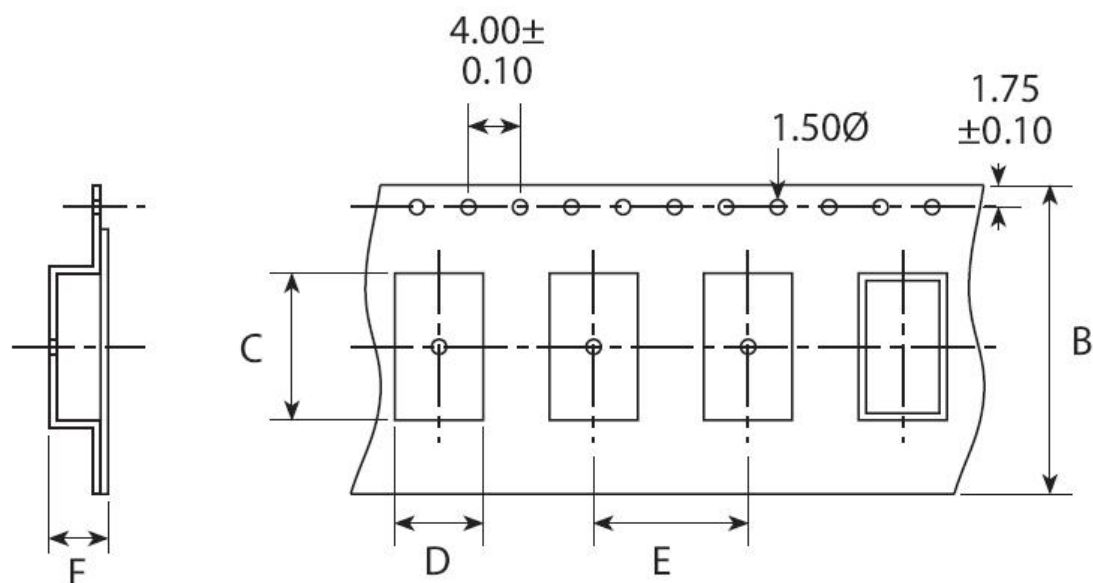

	A	B	C	D	E	F	G
SMD3225	178±2.0	8.0±0.3	3.55±0.10	2.80±0.10	4.0±0.1	0.85±0.10	60.5±1.0

b.) Dimensions of Reel

(UNIT: mm)

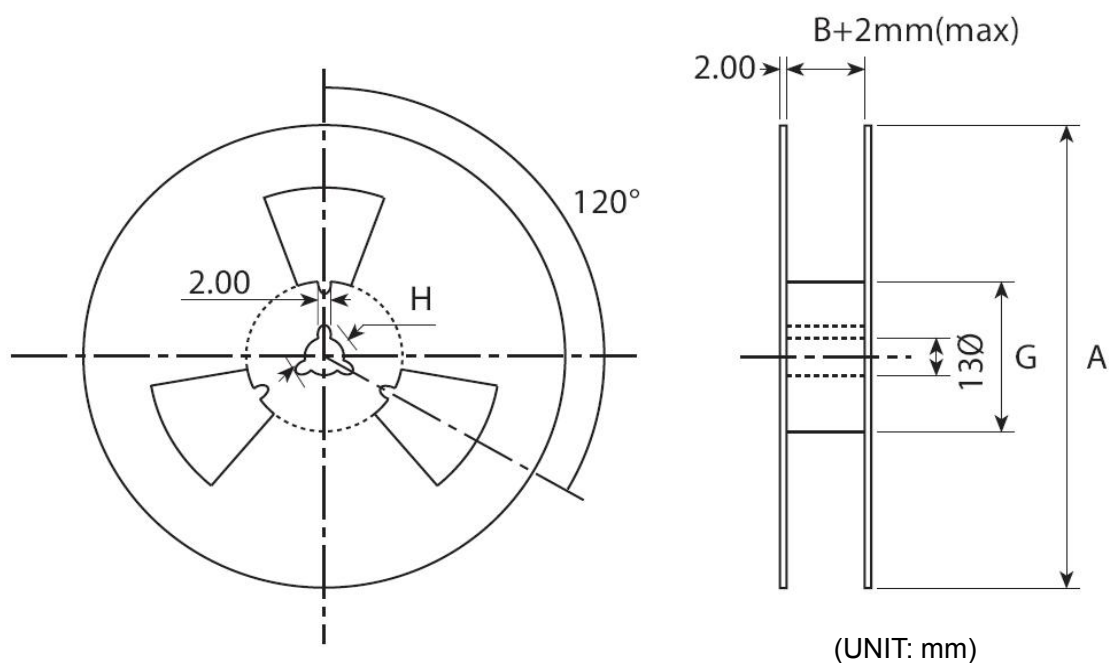

(UNIT: mm)

c.) Storage condition

FRONTER ELECTRONICS CO., LTD.		
DESCRIPTION	SMD3225 25.000MHz ±30ppm 18pF	Page:
DATE	2017-06-29	6 / 11

Temperature: +40deg.C Max.

Relative Humidity: 80% Max.

d.) Standard packing quantity

3,000PCS / REEL

e.) Material of the tape

Tape	Material
Carrier tape	A – PET
Top tape	Polyester

f.) Label contents

- .The type of product
- .Our specification No.
- .Your Part No.
- .Lot No.
- .Nominal Frequency
- .Quantity
- .Our Company Name


Sticks label for every reel.

PART NUMBER	
PO NO	
PR. NO:	
HOLDER TYPE	
FREQUENCY	
REMAKS	
QUANTITY	
FRONTER ELECTRONICS CO.,LTD.	

g.) Taping dimension

FRONTER ELECTRONICS CO., LTD.		
DESCRIPTION	SMD3225 25.000MHz $\pm$ 30ppm 18pF	Page:
DATE	2017-06-29	7 / 11

Leader	Cover-tape	The length of cover-tape in the leader is more than 400 mm including empty embossed area.
	Carrier-tape	After all products were packaged, must remain more than twenty pieces or 400 mm empty area, which should be sealed by cover-tape.
Terminal	Cover-tape	The tip of cover-tape shall be fixed temporary by paper tape and roll around the core of reel one round.
	Carrier-tape	The empty embossed area which are sealed by top cover-tape must remain more the 40 mm.

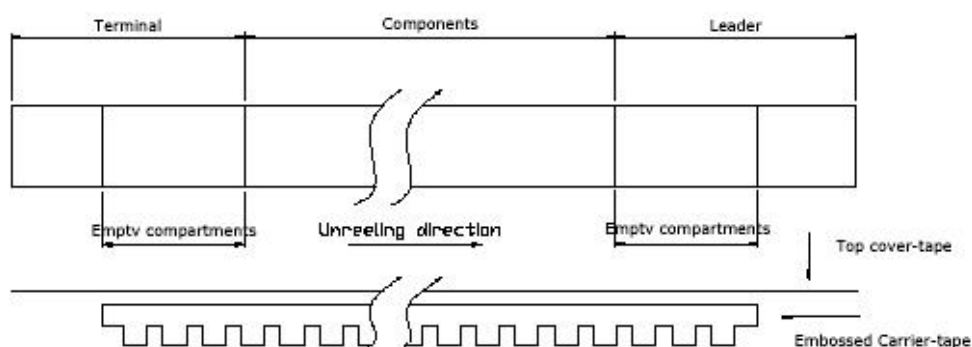

h.) Joint of tape

The carrier-tape and top cover-tape should not be jointed.

i.) Release strength of cover tape

It has to between 0.1N to 0.7N under following condition.

Pulling direction 165° to 180°

Speed 300mm/min.

Otherwise unless specified.



Other standards shall be based on JIS C 0806-1990.

5. Mechanical Endurance: Provided that measurement shall be carried out after letting it alone in the

FRONTER ELECTRONICS CO., LTD.		
DESCRIPTION	SMD3225 25.000MHz ± 30 ppm 18pF	Page:
DATE	2017-06-29	8 / 11

room temperature for 1 hour min.

	Item	Conditions	Specifications
5.1	Drop	Method: fallen on the concrete (thickness is 3cm or more) Height: 75 cm Direction: each direction of 3 mutually perpendicular (x、 y、 z) axis. Number of shocks: 2 shocks in each direction	Freq. Drift $\pm$ 5ppm Max Resistance Drift $\pm$ 15% Max
5.2	Vibration	Should be satisfied after supplying following vibration. (1)Vibration Frequency: 10~55Hz (2)Cycle: 1 to 2 Min. (3)Full Cycle: 1.5mm P-P. (4)Direction: X.Y.Z (5)Time: 2 Hours / Each Direction	Freq. Drift $\pm$ 5ppm Max Resistance Drift $\pm$ 15% Max
5.3	Substrate Bending	Mount the specimen on substrate. Apply the following pressure Direction: see Fig -1 Speed: 0.5 mm/sec Hours: 5 $\pm$ 1 sec Amount of substrate: 3 mm Max.	Without mechanical damage such as breaks. Without electrode peeling. Electrical characteristics shall be satisfied.
5.4	Adhesion	Mount the specimen on substrate. Apply the following pressure Direction: see Fig -2 Weight: 10N Hours: 10 $\pm$ 1 sec	
5.5	Body strength	Mount the specimen on substrate. Apply the following pressure Direction: see Fig -3 Weight: 10N Hours: 10 $\pm$ 1 sec	

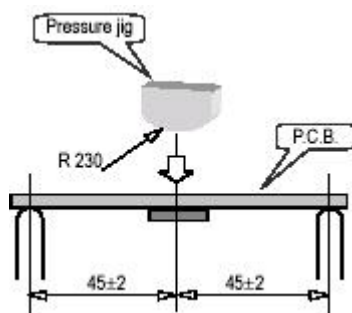


Fig-1

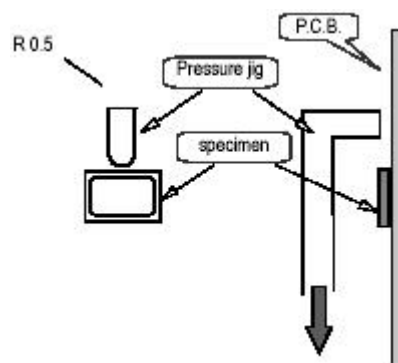


Fig-2

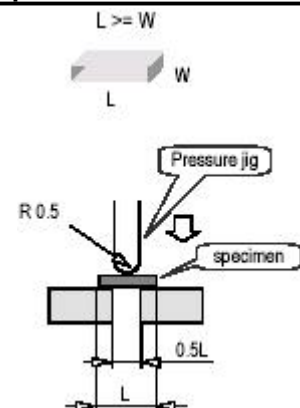
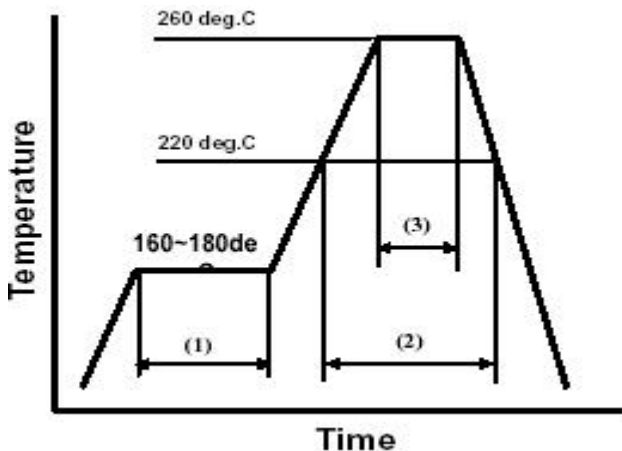


Fig-3

FRONTER ELECTRONICS CO., LTD.

DESCRIPTION	SMD3225 25.000MHz $\pm$ 30ppm 18pF	Page:
DATE	2017-06-29	9 / 11

5.6	Seal	Less than 3.0×10^{-8} atm.cc/sec by Helium leak detector. Also, no serial bubble is observed by Fluorinate tests.													
5.7	Solder ability	3 sec Dip in $235^{\circ}\text{C} \pm 5^{\circ}\text{C}$ solder. (Use ROSIN type flux for solder.)	More than 90% of lead shall be covered by new solder.												
5.8	Resistance to Soldering Heat	Run in Reflow Reflow soldering shall be allowed Only two(2) time. Available for Lead Free Soldering  <table data-bbox="453 1229 1011 1352"><tr><td>(1)</td><td>Preheat</td><td>160~180 deg.C</td><td>120sec.</td></tr><tr><td>(2)</td><td>Primary heat</td><td>220 deg.C</td><td>60sec.</td></tr><tr><td>(3)</td><td>Peak</td><td>260 deg.C</td><td>10sec. Max.</td></tr></table>	(1)	Preheat	160~180 deg.C	120sec.	(2)	Primary heat	220 deg.C	60sec.	(3)	Peak	260 deg.C	10sec. Max.	Freq. Drift $\pm 5\text{ppm Max.}$ Resistance Drift $\pm 20\% \text{ Max.}$
(1)	Preheat	160~180 deg.C	120sec.												
(2)	Primary heat	220 deg.C	60sec.												
(3)	Peak	260 deg.C	10sec. Max.												

FRONTER ELECTRONICS CO., LTD.

DESCRIPTION	SMD3225 25.000MHz $\pm 30\text{ppm}$ 18pF	Page:
DATE	2017-06-29	10 / 11

6. Environmental Endurance: Provided that measurement shall be carried out after letting it alone in the room temperature for 1 hour min.

	Item	Conditions	Specifications
6.1	Humidity	Should be satisfied after letting it alone at $+60^{\circ}\text{C}\pm 2^{\circ}\text{C}$ in humidity of 90%~95% for 500 hours.	Freq. Drift $\pm 5\text{ppm}$ Max Resistance Drift $\pm 15\%$ Max
6.2	Storage in Low Temperature	Should be satisfied after letting it alone at $-40^{\circ}\text{C}\pm 3^{\circ}\text{C}$ for 500 hours.	Freq. Drift $\pm 5\text{ppm}$ Max Resistance Drift $\pm 15\%$ Max
6.3	Storage in High Temperature	Should be satisfied after letting it alone at $+85^{\circ}\text{C}\pm 3^{\circ}\text{C}$ for 500 hours.	Freq. Drift $\pm 5\text{ppm}$ Max Resistance Drift $\pm 15\%$ Max
6.4	Temperature Cycle	Should be satisfied after supplying the following temperature cycle (100 cycles). (Refer to Fig-4). Temperature shift from low to high, high to low shall be done in $1^{\circ}\text{C}/\text{min}$.	Freq. Drift $\pm 5\text{ppm}$ Max Resistance Drift $\pm 15\%$ Max

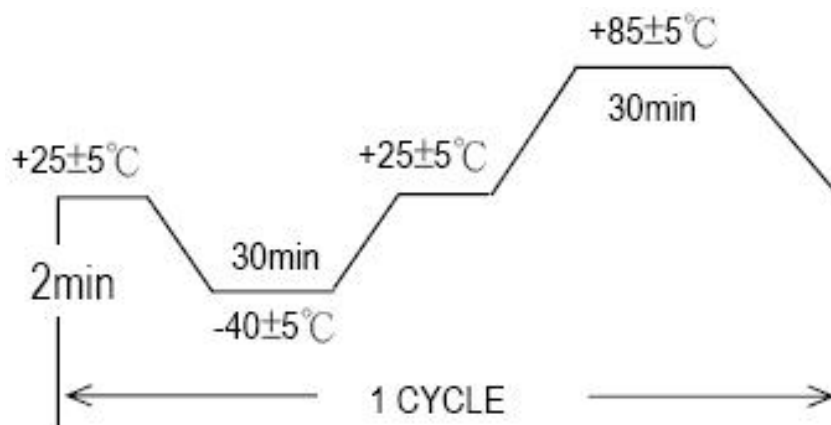


Fig-4

FRONTER ELECTRONICS CO., LTD.		
DESCRIPTION	SMD3225 25.000MHz $\pm 30\text{ppm}$ 18pF	Page:
DATE	2017-06-29	11 / 11